


ALTERNATE CURB  
REINFORCING

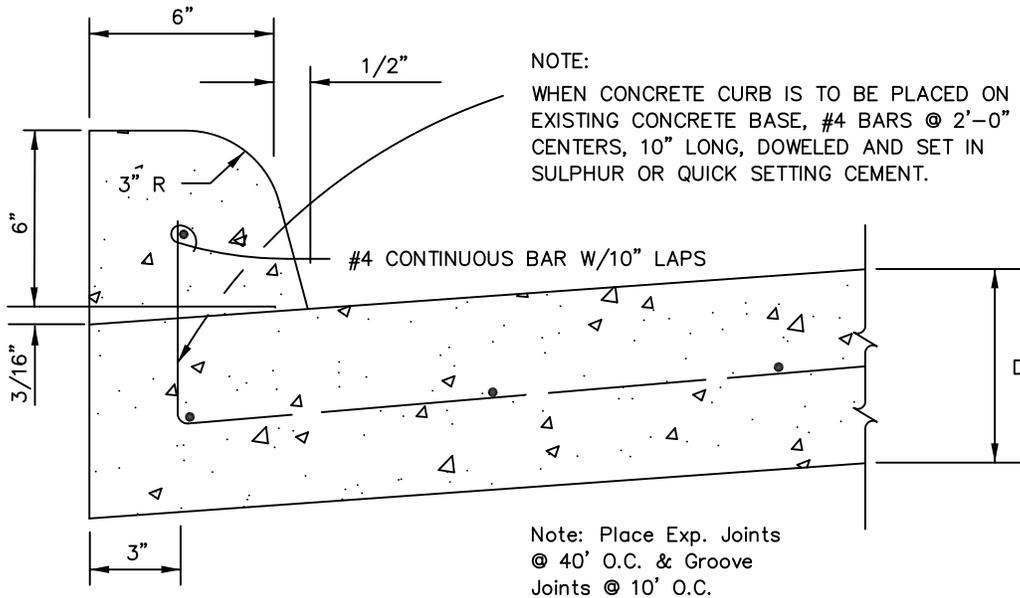

FINISH TO BE ACCOMPLISHED BY FLOATING, STEEL TROWELLING AND THEN BRUSHING.  
HAND FINISH NOT REQUIRED WHEN CURB AND GUTTER IS Poured BY A MACHINE, BUT  
CURB IS TO HAVE THE SAME OUTSIDE DIMENSIONS, AND HAVE A BRUSHED FINISH.

6" CONCRETE CURB

NOT TO SCALE

<b>CITY OF TOMBALL</b> ENGINEERING & PLANNING DEPARTMENT	
<b>CONCRETE CURB CONSTRUCTION DETAILS</b>	
APPROVED BY COT:	
ENGINEERING & PLANNING DEPARTMENT EFFECTIVE JULY 1, 2010	
SHEET 001 OF 001	DWG NO: COT STR-06